


FLEXIBLE INPUTS, ADDITIONAL OUTPUTS, OPTIONAL CAN NODE, HIGH-ACCURACY, HIGH VOLTAGE SUPPORT

The FlexiMonitor is a multipurpose additional and optional CAN Node for Eltek Smartpack2, Smartpack R and Smartpack S based control systems. FlexiMonitor adds many advanced features like high-accuracy current measurements, symmetry and voltage measurements down to battery cell level, high voltage fuse sensing, more control/alarm outputs and additional temperature measurements and more to your Smartpack2 based control system.

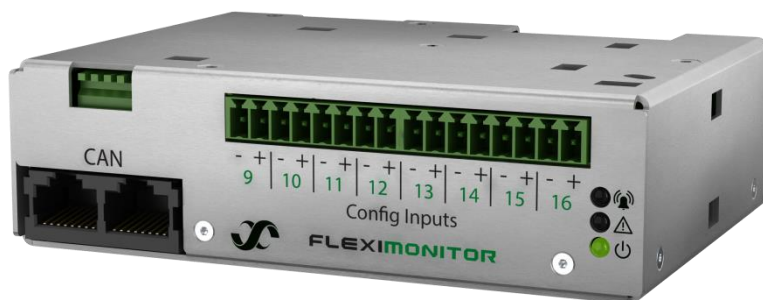

FLEXIMONITOR 400V

MULTIPURPOSE CAN NODE FOR ELTEK CONTROLLERS

Doc.no. EDM0000624580

APPLICATIONS

TELECOM – MOBILE / WIRELESS / FIXED

- RADIO BASE STATIONS
- CELL SITES
- MICROWAVE

OFFSHORE AND PROCESS INDUSTRY

- SAFETY AND AUTOMATION SYSTEMS (SAS)

RAILWAY INFRASTRUCTURE



- CONTROL & PROTECTION
- SIGNALING

POWER UTILITIES

- CONTROL & PROTECTION

DATA CENTER

- BATTERY MONITORING

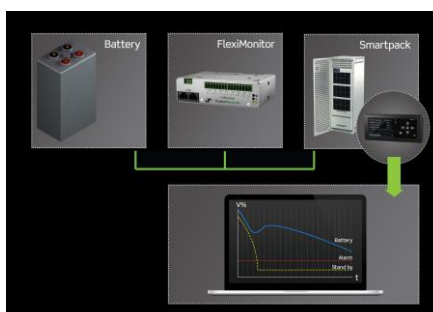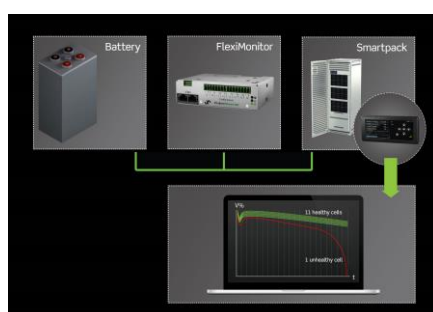

CELL VOLTAGE AND TEMPERATURE MONITORING

KEY FEATURES

- HIGH ACCURACY INPUTS FOR RECTIFIER, LOAD AND BATTERY CURRENT MEASUREMENTS
- INPUTS FOR TEMPERATURE PROBES
- VOLTAGE & SYMMETRY MEASUREMENTS ON BATTERY BANKS (WIDE RANGE 2V – 400V)
- HV & LV FUSE SENSE INPUTS
- PROGRAMMABLE DIGITAL INPUTS FOR ALARMING AND EVENT CONTROL
- SENSING OF 4-20mA SIGNALING
- TACHO (PULSE SENSE) INPUTS
- UP TO 28 UNITS CAN BE USED IN PARALLEL IN A CONTROL SYSTEM (TOTAL: 448 INPUTS)

FLEXIMONITOR 400V

MULTIPURPOSE CAN NODE FOR ELTEK CONTROLLERS

Model	CAN node
FlexiMonitor 400V	242100.608

INPUT DATA

Quantity	16 multipurpose
Voltage range	0 Vdc to 400Vdc
Current shunt range	-500mV to 500 mV
Temperature range	-20 to +70°C


OUTPUT DATA

Quantity	16
Relay outputs (with relay extension)	4 or 8
Voltage rating (with relay extension)	0-220 Vdc
Current rating (with relay extension)	0,02-8,0 A

OTHER SPECIFICATIONS

Dimensions (LxWxH)	115 x 84 x 36,6 mm
--------------------	--------------------

FLEXIMONITOR

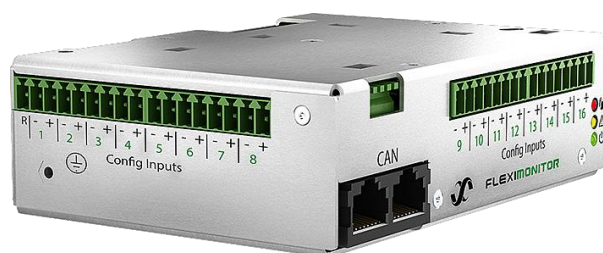

Model	CAN Node
Relay extension board	242100.604

OUTPUT DATA

Quantity	8
Voltage rating	0-220VDC, 0-240VAC
Current Rating	30V-2A
Current derating to	220V-0,02A

OTHER SPECIFICATIONS

Dimensions (LxWxH) incl. FlexiMon.	115x84x59,5 mm
------------------------------------	----------------

Model	CAN Node
Relay extension board	242100.605

OUTPUT DATA

Quantity	4
Voltage rating	0-220VDC, 0-240VAC
Current Rating	30V-8A
Current derating to	220V-0,1A


OTHER SPECIFICATIONS

Dimensions (LxWxH) incl. FlexiMon.	115x84x59,5 mm
------------------------------------	----------------

RELAY EXTENSION BOARD WITH 4 OUTPUTS



RELAY EXTENSION BOARD WITH 8 OUTPUTS

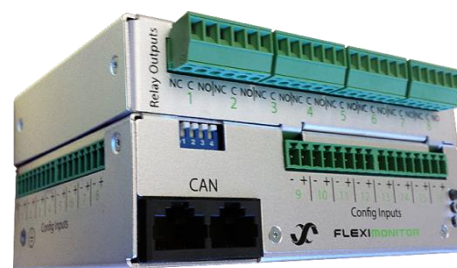

Model	CAN node
FlexiMonitor LED panel	242100.606


OUTPUT DATA

4 x Configurable push buttons	NO
16 x Configurable LED lamps	Red, Green, Blue, Yellow
Text templates	Customized
LED test	Push button

OTHER SPECIFICATIONS

Dimensions (LxWxH) incl. FlexiMon.	205 x 94 x 53 mm
------------------------------------	------------------

FLEXIMONITOR LED PANEL

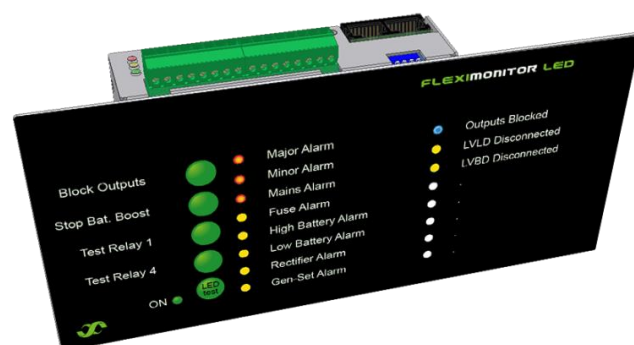

Specifications are subject to change without notice

FLEXIMONITOR 400V

MULTIPURPOSE CAN NODE FOR ELTEK CONTROLLERS

TECHNICAL SPECIFICATIONS

Model	FlexiMonitor 400V
Part number	242100.608

INPUTS

Quantity	16 per FlexiMonitor Each FlexiMonitor can be configured as primary or secondary on the same CAN bus address. Up to 14 pairs of primary and secondary in parallel in one control system Any input is configured in SW to act as voltage/symmetry, current shunt, fuse sense, temperature probe or tach/pulse sense input
Voltage Range Voltage Resolution	0V _{DC} to +400V _{DC} 10mV _{DC}
Current Shunt Range Current Shunt Resolution	-500mV to 500mV 15μV _{DC}
Example: 200A – 60mV	50mA _{DC}
Temperature Range Temperature Accuracy	-20 to +70°C ±2°C (0 to +40°C) ±4°C (-20 to 0°C and +40 to 70°C)
(Based on 470kΩ NTC probe)	
Tacho (pulse sense) Range	0 to 14400 ppm, resolution 6 ppm

OUTPUTS

Quantity	16 per FlexiMonitor (up to 14 pairs of primary and secondary units in parallel in one control system)
Connection	Ribbon cable terminals or plug-in relay extension boards
Maximum rating	10mA

RELAY EXTENSION BOARDS

Part number	242100.604	242100.605
Quantity	8	4
Voltage Rating	0-220V _{DC} (0-240V _{AC})	0-220V _{DC} (0-240V _{AC})
Current Rating	30V-2A derating to 220V-0.02A	30V-8A derating to 220V-0.1A

LED EXTENSION BOARD

Part number	242100.606
LED Lamps, quantity, type	1x Power ON lamp and 16x configurable, colour: Red, Green, Blue, Yellow
Push Buttons, quantity, type	1x Lamp Test push button and 4x configurable, type NO
Text Templates	Customizable

MOUNTING

DIN Rail clips	Part number: 331E28252300
Screw Hole (M4) clips	Part number: 331E28252400 (vertical) or Part number: 331E31506800 (horizontal)

GENERAL SPECIFICATIONS

Dimensions (LxWxH)	115 x 84 x 36.6 mm (4.53 x 3.31 x 1.32")
Dimensions (LxWxH) with relay extension board	115 x 84 x 59.5 mm (4.53 x 3.31 x 2.22")
Dimensions (LxWxH) with LED extension board	205 x 94 x 53 mm (8.07 x 3.7 x 1.97")
Casing material	Aluminum alloy
CAN Power consumption	Max. 200mA
Temperature Range	Operating -20 to +70°C (-4 to 158°F)

DESIGN STANDARDS

Electrical safety	UL 62368-1, EN 62368-1
EMC	ETSI EN 300 386 V.1.4.1 EN 61000-6-1 / -2 / -3 / -4